



High Bay Series

Lifespan
50,000hrs

Ambient Temperature
-40°C~+40°C

Humidity
≤95%

Hot selling Square High Bay

FEATURES

- ▶ High pressure die cast aluminum gearbox, Anti-static powder coat finish.
- ▶ Hook, ceiling mount or metal pipe installation ways are available.
- ▶ Beautiful appearance, Easy Installation, Maintenance Free.
- ▶ High efficient thermal conductive heat dissipation system.
- ▶ 5 years Lumen Maitain more than 70%, super long life span.
- ▶ High efficient Philips **LUXEON** TX Chips module ensures excellent performance.
- ▶ IP Rating: IP66

Application

- ▶ Workshop, Warehouse, Supermarket, etc

CERTIFICATION



SPECIFICATIONS

LM-79

LM-80




One Light More Application



Model	Input Power	ETL	DLC	Input Voltage	CCT	CRI	Delivered Lumens(5K)	Power Factor	THD	Installation
HB31A	80W	YES	YES	100-277V 50/60HZ	2700- 6500K	>75	8,480 LM	>0.92	<15%	Ceiling Mount, Hook, Metal Pipe or Bracket
HB32A	120W	YES	YES				12,720 LM			
HB33A	160W	YES	YES				16,960 LM			
HB34A	200W	YES	YES				21,200 LM			
HB35A	240W	YES	YES				25,440 LM			
HB36A	280W	YES	YES				29,680 LM			

DIMENSION

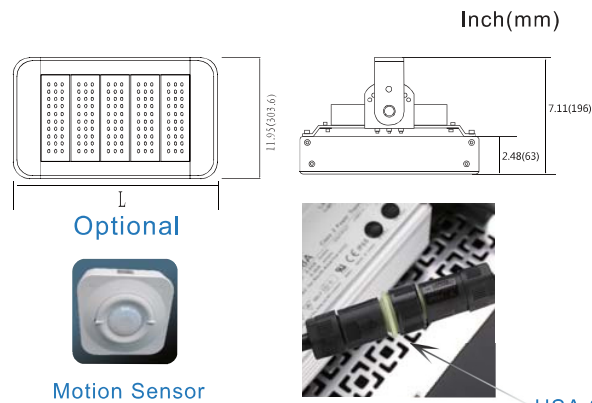

Model	Input Power	WEIGHT (Kg)
HB31A	80W	3.8
HB32A	120W	4.8
HB33A	160W	5.6
HB34A	200W	6.8
HB35A	240W	7.6
HB36A	280W	8.4

Optional



Motion Sensor



USA Standard Quicker connection

Model	L
HB31A	9.13(232)
HB32A	12.24(311)
HB33A	15.43(392)
HB34A	18.62(473)
HB35A	21.81(554)
HB36A	25.00(635)

Distribution Curve Flux

