



Flood Light Series

C192-FA SERIES

Lifespan 50,000hrs
 Ambient Temperature -40°C~+40°C
 Humidity ≤95%

FEATURES

- ▶ High pressure die cast aluminum housing, Anti-static powder coat finish.
- ▶ Highly efficient thermal conductive heat dissipation system.
- ▶ High efficient Bridgelux LED COB ensures excellent performance
- ▶ The fixture installation angle could be adjusted easily
- ▶ IP Rating: IP65

APPLICATIONS

- ▶ Gymnasiums, Billboards, Buildings, Parks, Parking Lots, etc.



CERTIFICATION



SPECIFICATIONS

Model	Input Power	ETL	DLC	Input Voltage	CCT	CRI	Delivered Lumens(5K)	Power Factor	THD	Installation
C192-FA10	10W	YES		100-277V 50/60HZ	2700- 6500K	>80	900 LM	>0.98	<15%	U-Bracket
C192-FA30	30W	YES					2,500 LM			
C192-FA50	50W	YES					4,250 LM			
C192-FA100	100W	YES					8,500 LM			
C192-FA120	120W	YES					10,200 LM			
C192-FA150	150W	YES					12,750 LM			
C192-FA200	200W	YES					17,000 LM			

DIMENSIONS

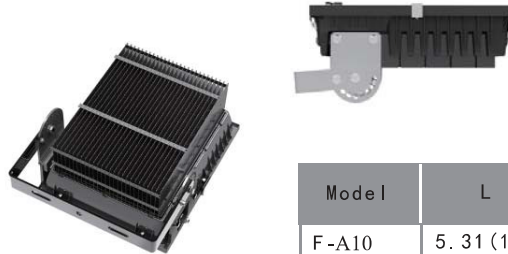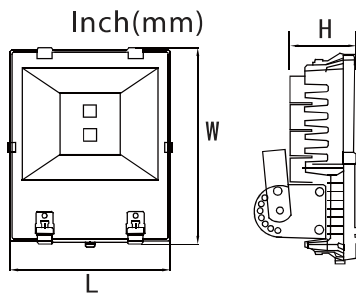

Model	Input Power	WEIGHT (Kg)
F-A10	10W	3.6
F-A30	30W	4.3
F-A50	50W	4.8
F-A100	100/120W	5.2
F-A150	150W	5.8
F-A200	200W	5.8

Model	L	W	H
F-A10	5.31 (135)	6.26 (159)	2.95 (75)
F-A30	7.09 (180)	7.60 (193)	3.66 (93)
F-A50	7.72 (196)	8.98 (228)	4.13 (105)
F-A100	10.79 (274)	12.80 (325)	4.92 (125)
F-A150	12.20 (310)	14.76 (375)	4.76 (121)
F-A200	13.39 (340)	15.55 (395)	4.76 (121)

Distribution Curve Flux

