



Canopy Light Series

C240-C01 SERIES

Lifespan 50,000hrs
 Ambient Temperature -40 C~+40 C
 Humidity ≤95%

FEATURES

- ▶ High pressure die cast aluminum housing, Anti-static powder coat finish.
- ▶ Silicon rubber gasket. UV stabilized plastic lens.
- ▶ LM80 Certification LED Chips module ensures durability.
- ▶ Quick and easy installation way for easy maintenance.
- ▶ IP Rating: IP65

APPLICATIONS

- ▶ Parking garages, Gas station, Warehouse, etc.

CERTIFICATION



LM-79 LM-80




SPECIFICATIONS

Input Power	ETL	DLC	Input Voltage	CCT	CRI	Delivered Lumens(5K)	Power Factor	THD	Installation
C01-48W	YES	YES	100-277V 50/60HZ	2700- 6500K	>75	4,000 LM	>0.92	<15%	Ceiling Mount
C01-60W	YES	YES				5,520 LM			
C01-80W	YES	YES				7,200 LM			
C01-94W	YES	YES				8,600 LM			

More models and wattages will be DLC listed, with time.

DIMENSION

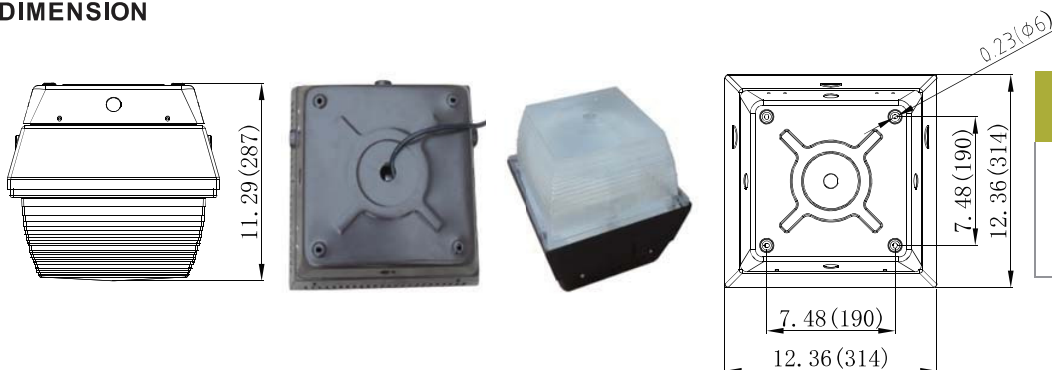

Model	Input Power	WEIGHT (Kg)
C01A	48W	4.2
	60W	4.8
	80W	5.3
	94W	5.6

Distribution Curve Flux

