



# Canopy Light Series

## C240-C08 SERIES

**New**

### FEATURES

- ▶ High pressure die cast aluminum housing, Anti-static powder coat finish.
- ▶ Highly efficient thermal conductive heat dissipation system.
- ▶ High efficient **LUXEON** LED Chip module ensures excellent performance.
- ▶ Quick and easy installation way for easy maintenance.
- ▶ IP Rating: IP65

### APPLICATIONS

- ▶ Gas station, Parking garages, Warehouse, etc.



### CERTIFICATION



LM-79 LM-80




### SPECIFICATIONS

Input Power	ETL	DLC	Input Voltage	CCT	CRI	Delivered Lumens(5K)	Power Factor	THD	Installation
C08A-80W	YES	YES	100-277V 50/60HZ	2700-6500K	>75	8,087 LM	>0.92	<15%	Recessed
C08B-120W	YES	YES				12,493 LM			
C08C-160W	YES	YES				16,803 LM			

More models and wattages will be DLC listed, with time.

### DIMENSION

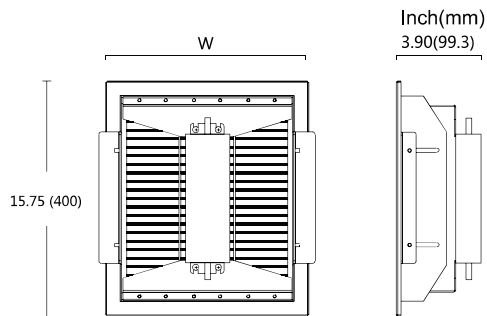

Inch(mm)  
3.90(99.3)



Model	Input Power	Width
C08A	80W	9.53 (242)
C08B	120W	12.64 (321)
C08C	160W	15.75 (400)

### Distribution Curve Flux

