



Canopy Light Series

C240-C11A SERIES

Lifespan 50,000hrs
 Ambient Temperature -40°C~+40°C
 Humidity <= 95%

FEATURES

- ▶ High pressure die cast aluminum housing, Anti-static powder coat finish.
- ▶ Highly efficient thermal conductive heat dissipation system.
- ▶ High efficient Cree X-TE LED Chips module ensures durability.
- ▶ Quick and easy installation way for easy maintenance.
- ▶ IP Rating : IP65

APPLICATIONS

- ▶ Gas station, Parking garages, Warehouse, etc.

CERTIFICATION



LM-79 LM-80




SPECIFICATIONS

Input Power	ETL	DLC	Input Voltage	CCT	CRI	Delivered Lumens(5K)	Power Factor	THD	Installation
C11A-80W	YES	YES	100-277V 50/60HZ	2700-6500K	>75	7,600 LM	>0.92	<15%	Ceiling Mount
C11A-100W	YES	YES				9,000 LM			
C11A-120W	YES	Pending				10,200 LM			

More models and wattages will be DLC listed, with time.

DIMENSION

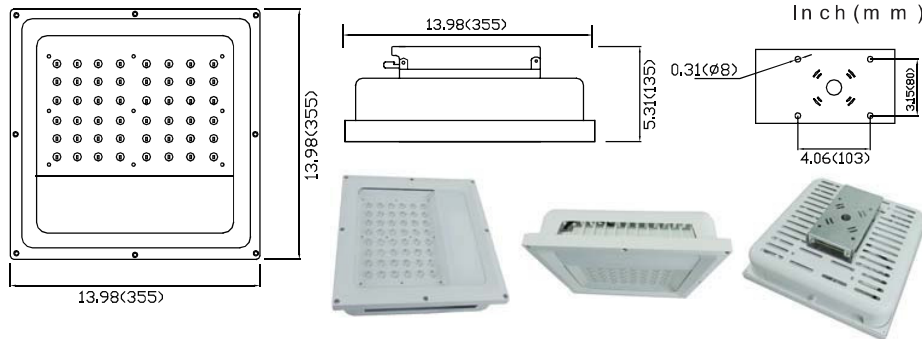

Model	Input Power	WEIGHT (Kg)
C11A	80W	6.9
	100W	7.8
	120W	8.5

Distribution Curve Flux

