



Canopy Light Series

C240-C11B SERIES

Lifespan 50,000hrs
 Ambient Temperature -40°C~+40°C
 Humidity ≦95%

FEATURES

- ▶ High pressure die cast aluminum housing, Anti-static powder coat finish.
- ▶ Highly efficient thermal conductive heat dissipation system.
- ▶ High efficient Cree X-TE LED Chips module ensures durability.
- ▶ Quick and easy installation way for easy maintenance.
- ▶ IP Rating: IP65

APPLICATIONS

- ▶ Gas station, Parking garages, Warehouse, etc.



CERTIFICATION



LM-79 LM-80




SPECIFICATIONS

Input Power	ETL	DLC	Input Voltage	CCT	CRI	Delivered Lumens(5K)	Power Factor	THD	Installation
C11B-80W	YES	YES	100-277V 50/60HZ	2700-6500K	>75	7,600 LM	>0.92	<15%	Recessed
C11B-100W	YES	YES				9,000 LM			
C11B-120W	YES	Pending				10,200 LM			

More models and wattages will be DLC listed, with time.

DIMENSION

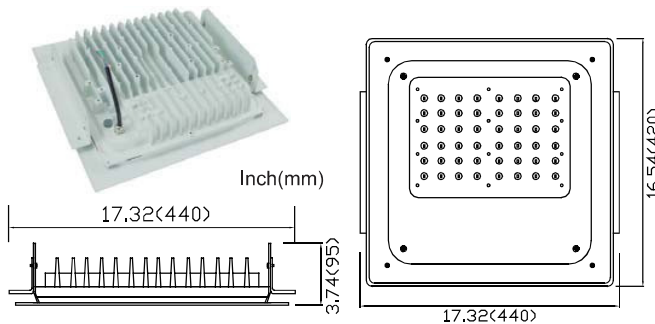

Available for Flood Application



Model	Input Power	WEIGHT (Kg)
C11B	80W	7.6
	100W	8.2
	120W	8.9

Distribution Curve Flux

