

Vapor Tight Series

C240-V1 SERIES

Lifespan 50,000hrs
 Ambient Temperature -40°C~+40°C
 Humidity ≦95%

FEATURES

- ▶ Frosted or transparent PC lens both are available.
- ▶ Available in 1x2, 1x4 and 1x6 configurations.
- ▶ LM-80 tested LED populated custom strips provide ideal light distribution.
- ▶ No tools are required for ballast access. Mounting options can be hanging or ceiling attached.
- ▶ Different mounting options available.
- ▶ IP Rating: IP66(Module)

APPLICATIONS

- ▶ Workshop, Warehouse, Supermarket, etc



CERTIFICATION



LM-79 LM-80

SPECIFICATIONS

Model	Input Power	ETL	DLC	Input Voltage	CCT	CRI	Efficiency	Power Factor	THD	Installation
V11A	24W	YES		100-277V 50/60HZ	2700- 6500K	>75	Chip: 120-130Lm/W System: 90-100Lm/W	>0.92	<15%	Hanging Or Mounting
	36W	YES								
V12A	45W	YES								
	65W	YES	Pending							
	85W	YES	Pending							
V13A	65W	YES								
	100W	YES								
	135W	YES								
	160W	YES								

More models and wattages will be DLC listed, with time.



DIMENSION



Hanging or mounting



Hanging or mounting

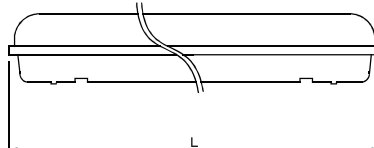

Inch(mm)

4.13(105)

6.42(163)

Model	L (Length) (mm/inch)
V11A	25.90(658)
V12A	49.92(1268)
V13A	72.04(1830)

Distribution Curve Flux

