



# Vapor Tight Series

## C240-V2 SERIES

Lifespan 50,000hrs  
 Ambient Temperature -40°C~+40°C  
 Humidity ≤95%

### FEATURES

- ▶ Frosted or transparent PC lens both are available.
- ▶ Available in 1x2, 1x4 and 1x6 configurations.
- ▶ LM-80 tested LED populated custom strips provide ideal light distribution.
- ▶ No tools are required for ballast access. Mounting options can be hanging or ceiling attached.
- ▶ Different mounting options available.
- ▶ IP Rating: IP65

### APPLICATIONS

- ▶ Workshop, Warehouse, Supermarket, etc

### CERTIFICATION



LM-79 LM-80




### SPECIFICATIONS

| Model   | Input Power | ETL | DLC     | Input Voltage       | CCT            | CRI | Delivered Lumens(5K) | Power Factor | THD  | Installation              |
|---------|-------------|-----|---------|---------------------|----------------|-----|----------------------|--------------|------|---------------------------|
| V 2 1 A | 100W        | YES |         | 100-277V<br>50/60HZ | 2700-<br>6500K | >75 | 9,500 LM             | >0.92        | <15% | Hanging<br>Or<br>Mounting |
|         | 135W        | YES |         |                     |                |     | 12,825 LM            |              |      |                           |
|         | 160W        | YES | Pending |                     |                |     | 15,200 LM            |              |      |                           |

More models and wattages will be DLC listed, with time.

### DIMENSION

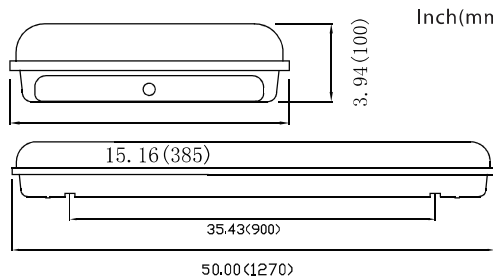

### Distribution Curve Flux

