


TF2-2'x4'

LED TROFFER Light

Project	Type
Project Location	
Catalog #	Qty

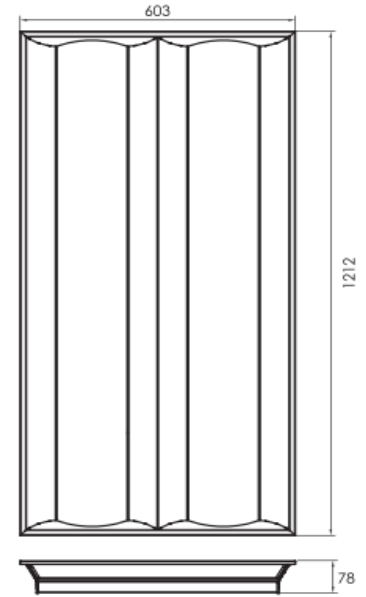

DESCRIPTION

LED Troffer Light designed for American market, uniform and soft light, advanced refractive optics delivers greater distribution and uniformity of light, delivers high lumen of exceptional CRI while achieving high LPW in 100~277 VAC input with constant current driver. Color temperature in 300K, 4000k, 5000k CCT and 1-10V dimming option.


It is as well-designed, lay-in ceiling troffer fixture for new construction applications or retrofitting fluorescent panel light fixtures widely used in office spaces, retail stores, education, government, healthcare, and hospitality.

Suitable for Damp locations. Beam Angle 120°

SPECIFICATIONS

Ordering Information

Sample Catalog No.: **C200-TF2-2x4-55W-40K**

Model No.	Wattage	CRI	PF	Lumens	Dimensions	Input V	CCT. (K)	 Dimmable	Life Span
C117-TF2-2x4-50	50W	>80Ra	>0.9	4250-4400	2x4ft (603*1212)	100-277	3000-5000	Yes	50,000(h)
C200-TF2-2x4-55	55W	>80Ra	>0.95	4740-4800	2x4ft (603*1212)	100-277	4000-5000	Yes	50,000(h)

Cobolight reserves the right to make technical improvements & modifications without notice. Visit our website for latest version V.1606



8088, Trans-Canada Highway
Montreal, Qc., H4S 1M5, CANADA

T. +1 (514) 745-1414
F. +1 (514) 745-4664

info@Cobolight.com
Cobolight.com