


10W LED

- 50 000 hours (L70/B50)
- 580 lm (3000K)
- Dimmable (trailing edge)
- 3000K
- CRI>80
- MacAdam/SDCM: 3
- Fixed LED Light Source. Can be replaced by authorized personnel.

Photometric: 10W LED



BASSI	E26 ETL E26 120V		E27 E27 230V	18W G24d-2 230V	10W Fixed LED Light Source, 230V
WHITE	651188		611180	611183	611187
BLACK	654188	614180	614183	614187	
GRAPHITE	653188	623180	623183	623187	

MATERIAL: Housing: Aluminium. Surface treatment: Dry powder polyester coating. Diffuser: UV-stabilized polycarbonate

Materials and Manufacturing:



The aluminium housing is made of high purity marine grade aluminium and treated with a 6 stage chrome plating treatment and dry powder polyester coating ensuring excellent corrosion resistance.

All screws are made of marine grade stainless steel. The diffuser is made of UV stabilized polycarbonate protecting against warping or discoloration and is vandal proof.



BASSO	E26 ETL E26 120V		2x18W G24d-2 230V	2x18W HF G24q-2 230V	18W HF EM:1H G24q-2 230V
WHITE	621190		611191	611193	611195
BLACK	624190	614191	614193	614195	
GRAPHITE	633190	623191	623193	623195	

MATERIAL: Housing: Aluminium. Surface treatment: Dry powder polyester coating. Diffuser: UV-stabilized polycarbonate

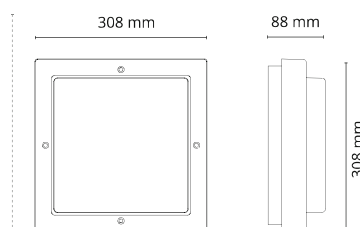

BASSI 230V IP65 IK10 850°

BASSO 230V IP65 IK10 850°